


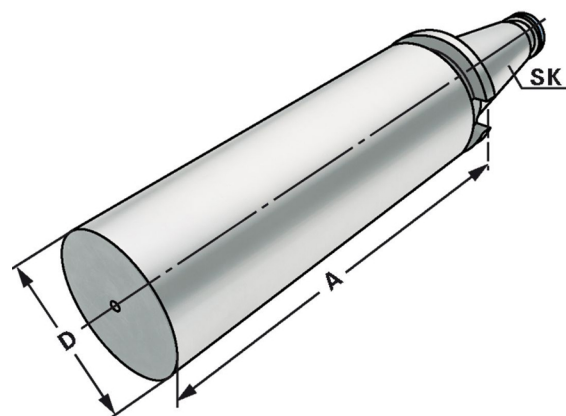

- All holders are made of forged steel
- Specific, low warpage hardened
- Surface hardened HRC 58~60
- Hardening depth 0,8mm~0,9mm
- Taper angle tolerance < AT 3 according to DIN 2080
- Surface roughness $R_a < 0,4 \mu\text{m}$
- Tensile strength in the core of min. 800 N/mm² after DIN
- All functional surfaces fine machined

Type :	Rohling
Taper :	SK
Face contact :	Nein
Balluffchip bore :	Ja
Standard :	DIN 69871
Cooling version :	A
D :	97
Taper size :	50
A :	315